

C.I.P.**220 Swift**

Pays d'origine: US

TAB.


I

Date

84-06-14

Révision

08-09-23

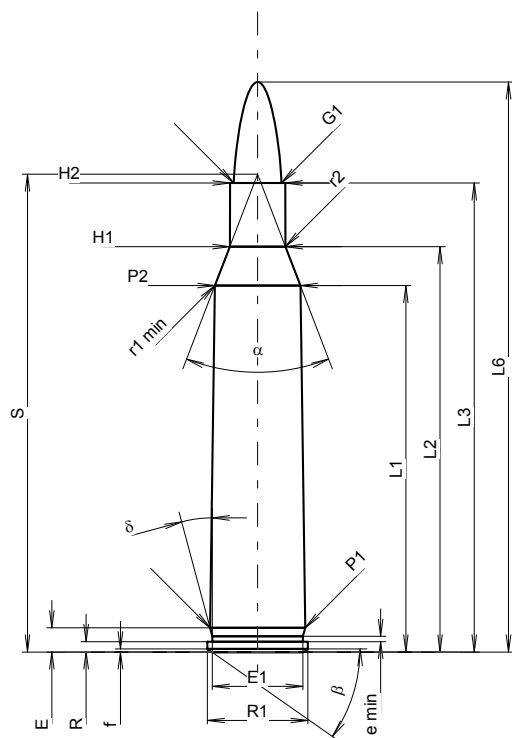**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	43.76	-0.20
L2 ¹⁾	=	48.41	-0.20
L3 ¹⁾	=	56.01	
L4	=		
L5	=		
L6	=	68.07	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	2.89	
E1	=	10.82	
e min	=	0.64	
δ	=	15°	
f	=	0.38	
β	=	35°	

Chambre à poudre

P1	=	11.36	
P2 ¹⁾ *	=	10.21	-0.20

Cône de raccordement

α [*]	=	42°	
S [*]	=	57.06	
r1 min	=	0.76	
r2	=	2.54	

Collet

H1 [*]	=	6.64	
H2 ¹⁾	=	6.60	

Projectile

G1 ¹⁾	=	5.70	
G2	=		
F	=		
L3+G ¹⁾	=	60.22	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4300 bar	
PK	=	4945 bar	
PE	=	5375 bar	
M	=	25.00	
EE	=	2380 Joule	

Autres indications

Fe ¹⁾³⁾	=	0.10	
delta L	=	0.10	

CHAMBRE MINI**Longueurs**

L1	=	43.62	
L2	=	48.27	
L3 ¹⁾	=	56.16	

Cuvette

R	=	1.35	
R1	=	12.27	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	1.35	
P1 ¹⁾	=	11.43	
P2 [*]	=	10.24	

Cône de raccordement

α ¹⁾ *	=	42°	
S [*]	=	56.96	
r1 max	=	0.76	
r2	=	3.81	

Collet

H1 [*]	=	6.67	
H2 ¹⁾	=	6.63	

Prise de rayures


G1 ¹⁾ *	=	5.74	
G ¹⁾	=	4.21	
α1	=	60°	
h [*]	=	0.77	
s	=		
i ¹⁾ *	=	1°30'	
w	=		

Canon

F ¹⁾ *	=	5.56	
Z ¹⁾	=	5.69	

Rayures

b	=	1.88	
N	=	6	
u	=	356.00	
Q	=	25.03	mm ²

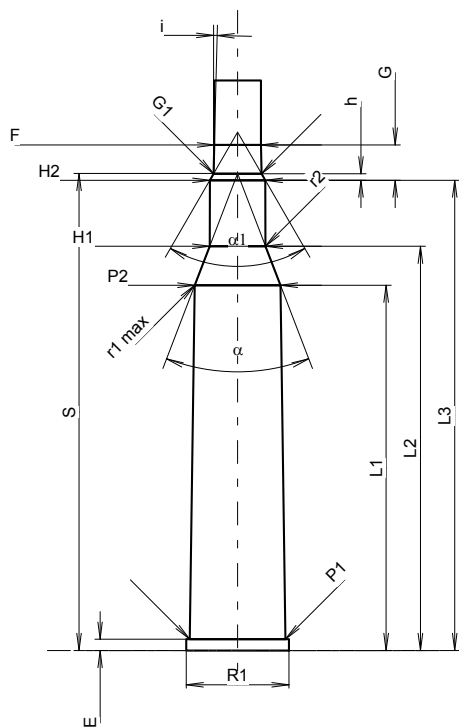

Échelle 1.11:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
3) Feuillure sur la cone de raccordement
* Dimensions de base