


C.I.P.**222 Rem. Mag.**

TAB. I

Date 84-06-14

Pays d'origine: US

Révision 06-09-19

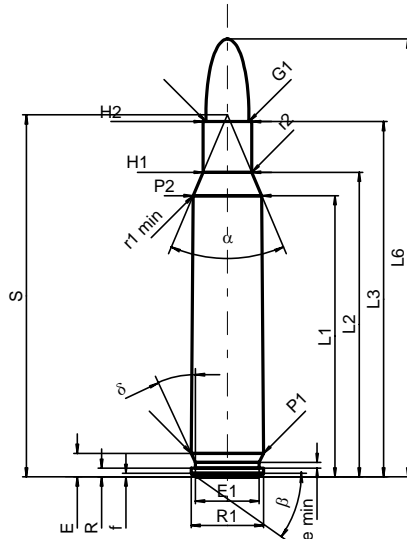**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	37.18	-0.20
L2 ¹⁾	=	40.29	-0.20
L3 ¹⁾	=	46.99	
L4	=		
L5	=		
L6	=	57.91	

Culot

R	=	1.14	
R1	=	9.60	
R3	=		
E	=	3.11	
E1	=	8.43	
e min	=	0.76	
delta	=	25°	
f	=	0.45	
beta	=	35°	

Chambre à poudre

P1	=	9.56	
P2 ^{1)*}	=	9.07	-0.20

Cône de raccordement

alpha*	=	46°	
S*	=	47.86	
r1 min	=	0.64	
r2	=	2.54	

Collet

H1*	=	6.43	
H2 ¹⁾	=	6.43	

Projectile

G1 ¹⁾	=	5.70	
G2	=		
F	=		
L3+G ¹⁾	=	49.18	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4050 bar	
PK	=	4658 bar	
PE	=	5060 bar	
M	=	25.00	
EE	=	1820 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=	0.09	

CHAMBRE MINI**Longueurs**

L1	=	37.07	
L2	=	40.15	
L3 ¹⁾	=	47.29	

Cuvette

R	=		
R1	=	9.63	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.11	
P1 ¹⁾	=	9.59	
P2*	=	9.09	

Cône de raccordement

alpha ^{1)*}	=	46°	
S*	=	47.78	
r1 max	=	0.64	
r2	=	3.18	

Collet

H1*	=	6.48	
H2 ¹⁾	=	6.45	

Prise de rayures


G1 ^{1)*}	=	5.69	
G ¹⁾	=	2.19	
alpha1	=	90°	
h	=	0.38	
s*	=	1.02	
i ^{1)*}	=	3°10'36"	
w	=		

Canon

F ^{1)*}	=	5.56	
Z ¹⁾	=	5.69	

Rayures

b	=	2.03	
N	=	6	
u	=	356.00	
Q	=	25.09	mm ²

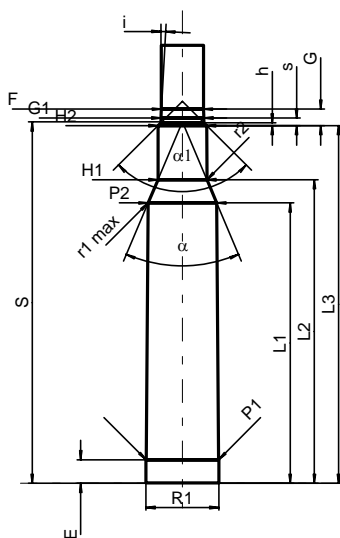

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A contrôler pour la sécurité
* Dimensions de base