

C.I.P.**257 Roberts**

TAB.

I

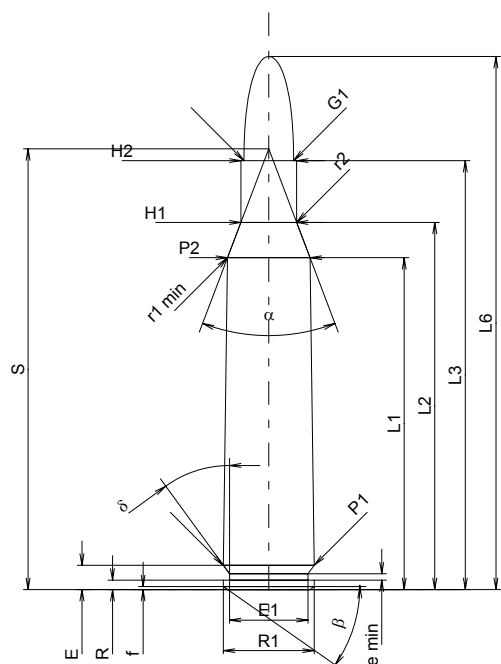
Date

84-06-14

Pays d'origine: US

Révision

02-05-15

**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	43.88	-0.20
L2 ¹⁾	=	48.55	-0.20
L3 ¹⁾	=	56.72	
L4	=		
L5	=		
L6	=	70.49	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.20	
E1	=	10.39	
e min	=	0.84	
δ	=	36°	
f	=	0.38	
β	=	35°	

Chambre à poudre

P1	=	12.02	
P2 ^{1)*}	=	10.91	-0.20

Cône de raccordement

α [*]	=	41°30'	
S [*]	=	58.28	
r1 min	=	0.76	
r2	=	2.54	

Collet

H1 [*]	=	7.37	
H2 ¹⁾	=	7.37	

Projectile

G1 ¹⁾	=	6.55	
G2	=		
F	=		
L3+G ¹⁾	=	59.85	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3550 bar	
PK	=	4083 bar	
PE	=	4440 bar	
M	=	25.00	
EE	=	2850 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=	0.15	

CHAMBRE MINI**Longueurs**

L1	=	43.66	
L2	=	48.36	
L3 ¹⁾	=	57.25	

Cuvette

R	=		
R1	=	12.13	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.20	
P1 ¹⁾	=	12.04	
P2 [*]	=	10.96	

Cône de raccordement

α ^{1)*}	=	41°18'	
S [*]	=	58.20	
r1 max	=	0.76	
r2	=	3.18	

Collet

H1 [*]	=	7.42	
H2 ¹⁾	=	7.39	

Prise de rayures

G1 ^{1)*}	=	6.63	
G ¹⁾	=	3.13	
α1 [*]	=	90°	
h	=	0.38	
s	=		
i ^{1)*}	=	2°55'	
w	=		

Canon

F ^{1)*}	=	6.35	
Z ¹⁾	=	6.50	

Rayures

b	=	2.41	
N	=	6	
u	=	254.00	
Q	=	32.78	mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base