

C.I.P.**270 Win.**

TAB.

I

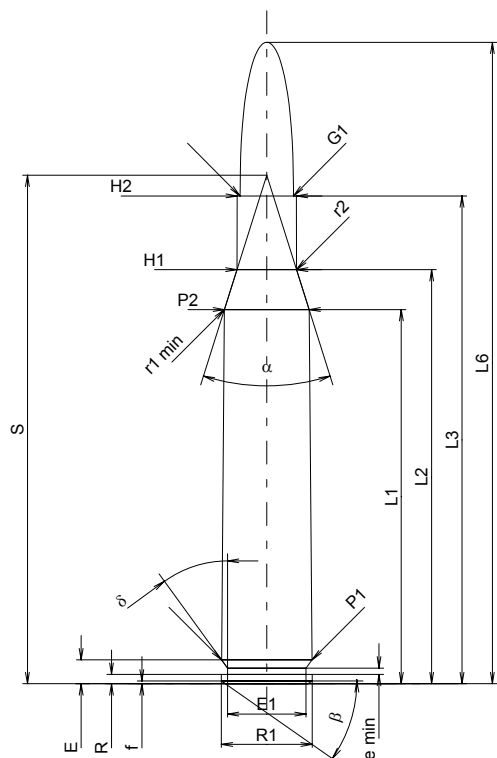
Date

84-06-14

Pays d'origine: US

Révision

02-05-15

**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	49.49	-0.20
L2 ¹⁾	=	54.77	-0.20
L3 ¹⁾	=	64.52	
L4	=		
L5	=		
L6	=	84.84	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.16	
E1	=	10.39	
e min	=	0.84	
delta	=	36°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	11.96	
P2 ¹⁾ *	=	11.20	-0.20

Cône de raccordement

alpha*	=	35°	
S*	=	67.25	
r1 min	=	0.76	
r2	=	3.81	

Collet

H1*	=	7.87	
H2 ¹⁾	=	7.82	

Projectile

G1 ¹⁾	=	7.06	
G2	=		
F	=		
L3+G ¹⁾	=	72.61	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4300 bar	
PK	=	4945 bar	
PE	=	5375 bar	
M	=	25.00	
EE	=	3840 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=	0.14	

CHAMBRE MINI**Longueurs**

L1	=	49.28	
L2	=	54.68	
L3 ¹⁾	=	65.02	

Cuvette

R	=		
R1	=	12.04	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.16	
P1 ¹⁾	=	11.99	
P2*	=	11.24	

Cône de raccordement

alpha ¹⁾ *	=	34°30'	
S*	=	67.38	
r1 max	=	0.76	
r2	=	3.81	

Collet

H1*	=	7.89	
H2 ¹⁾	=	7.84	

Prise de rayures

G1 ¹⁾ *	=	7.07	
G ¹⁾	=	8.09	
alpha1*	=	74°40'12"	
h	=	0.50	
s	=		
i ¹⁾ *	=	0°47'33"	
w	=		

Canon

F ¹⁾ *	=	6.86	
Z ¹⁾	=	7.04	

Rayures

b	=	4.06	
N	=	4	
u	=	254.00	
Q	=	38.52	mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base