

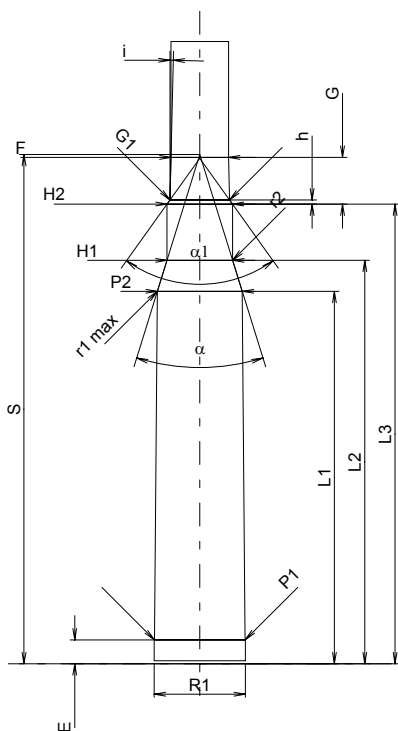
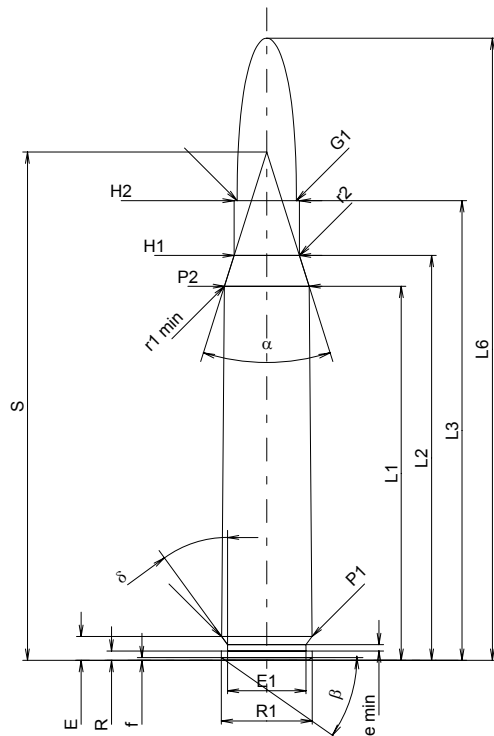
C.I.P.**30-06 Court Cartry**

Pays d'origine: FR

TAB. I

Date 95-12-10

Révision 02-05-15

**CARTOUCHE MAXI****Longueurs**

L1 ^{1)*}	=	49.49	-0.20
L2 ^{1)*}	=	53.56	-0.20
L3 ¹⁾	=	60.80	
L4	=		
L5	=		
L6	=	82.30	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.16	
E1	=	10.39	
e min	=	0.84	
delta	=	36°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	11.96	
P2 ^{1)*}	=	11.20	-0.20

Cône de raccordement

alpha	=	35°02'39"	
S	=	67.23	
r1 min	=	1.27	
r2	=	2.54	

Collet

H1*	=	8.63	
H2 ¹⁾	=	8.63	

Projectile

G1 ¹⁾	=	7.85	
G2	=		
F	=		
L3+G ¹⁾	=	66.97	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3500 bar	
PK	=	4025 bar	
PE	=	4375 bar	
M	=	25.00	
EE	=	3800 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=	0.15	

CHAMBRE MINI**Longueurs**

L1*	=	49.27	
L2*	=	53.36	
L3 ¹⁾	=	60.81	

Cuvette

R	=		
R1	=	12.04	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.16	
P1 ¹⁾	=	11.99	
P2*	=	11.24	

Cône de raccordement

alpha ¹⁾	=	34°30'03"	
S	=	67.37	
r1 max	=	1.27	
r2	=	3.05	

Collet

H1*	=	8.70	
H2 ¹⁾	=	8.65	

Prise de rayures

G1 ^{1)*}	=	7.89	
G ^{1)*}	=	6.17	
alpha1	=	71°16'12"	
h*	=	0.53	
s	=		
i ¹⁾	=	1°22'13"	
w	=		

Canon

F ^{1)*}	=	7.62	
Z ¹⁾	=	7.82	

Rayures

b	=	4.49	
N	=	4	
u	=	254.00	
Q	=	47.52	mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base