

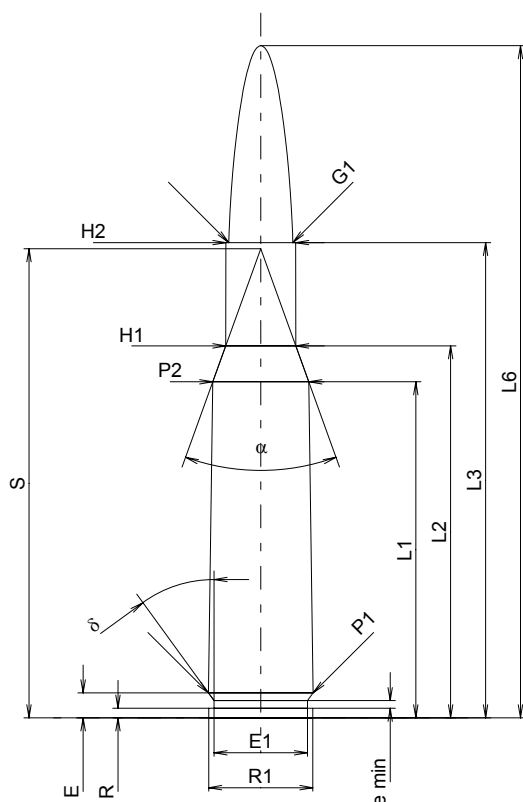
C.I.P.**333 Riml. N.E.**

TAB. I

Date 84-06-14

Pays d'origine: GB

Révision 02-05-15

**CARTOUCHE MAXI****Longueurs**

L1 ^{1)*}	=	44.45	-0.20
L2 ^{1)*}	=	49.20	-0.20
L3 ¹⁾	=	62.86	
L4	=		
L5	=		
L6	=	88.90	

Culot

R	=	1.27	
R1	=	13.79	
R3	=		
E	=	3.30	
E1	=	12.37	
e min	=	1.02	
delta	=	36°02'39"	
f	=		
beta	=		

Chambre à poudre

P1	=	13.84	
P2 ^{1)*}	=	12.70	-0.20

Cône de raccordement

alpha	=	39°42'15"	
S	=	62.04	
r1 min	=		
r2	=		

Collet

H1*	=	9.27	
H2 ¹⁾	=	9.22	

Projectile

G1 ¹⁾	=	8.46	
G2	=		
F	=		
L3+G ¹⁾	=	68.97	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3300 bar	
PK	=	3795 bar	
PE	=	4125 bar	
M	=	25.00	
EE	=	4320 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=		

CHAMBRE MINI**Longueurs**

L1*	=	44.40	
L2*	=	49.15	
L3 ¹⁾	=	63.17	

Cuvette

R	=	1.27	
R1	=	13.84	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.30	
P1 ¹⁾	=	13.87	
P2*	=	12.73	

Cône de raccordement

alpha ¹⁾	=	39°42'14"	
S	=	62.03	
r1 max	=		
r2	=		

Collet

H1*	=	9.30	
H2 ¹⁾	=	9.25	

Prise de rayures

G1 ^{1)*}	=	8.50	
G ^{1)*}	=	6.11	
alpha1	=	90°	
h*	=	0.38	
s	=		
i ¹⁾	=	1°29'57"	
w	=		

Canon

F ^{1)*}	=	8.20	
Z ¹⁾	=	8.46	

Rayures

b	=		
N	=		
u	=		
Q	=	52.81	mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base