

C.I.P.**45 Blaser**

TAB.

I


Date

04-09-27

Révision

05-12-07

Pays d'origine: DE

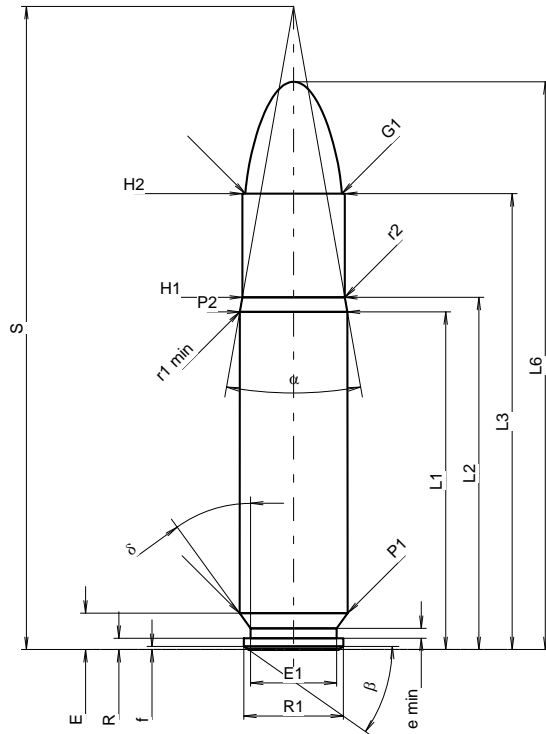**CARTOUCHE MAXI****Longueurs**

L1 ^{1)*}	=	40.74	-0.20
L2 ^{1)*}	=	42.50	-0.20
L3 ¹⁾	=	55.00	
L4	=		
L5	=		
L6	=	68.50	

Culot

R	=	1.37	
R1	=	12.01	
R3	=		
E	=	4.39	
E1	=	10.39	
e min	=	1.20	
delta	=	36°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	13.03	
P2 ^{1)*}	=	12.98	-0.20

Cône de raccordement

alpha	=	19°58'44"	
S	=	77.59	
r1 min	=	0.50	
r2	=	0.50	

Collet

H1 *	=	12.36	
H2 ¹⁾	=	12.36	

Projectile

G1 ¹⁾	=	11.64	
G2	=		
F	=		
L3+G ¹⁾	=	59.19	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3700 bar	
PK	=	4255 bar	
PE	=	4625 bar	
M	=	25.00	
EE	=	4650 Joule	

Autres indications

Fe	=	0.15	
delta L	=		

CHAMBRE MINI**Longueurs**

L1 *	=	40.66	
L2 *	=	42.42	
L3 ¹⁾	=	55.25	

Cuvette

R	=		
R1	=	12.03	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	4.41	
P1 ¹⁾	=	13.08	
P2 *	=	13.02	

Cône de raccordement

alpha ¹⁾	=	19°58'44"	
S	=	77.62	
r1 max	=	0.50	
r2	=	0.50	

Collet

H1 *	=	12.40	
H2 ¹⁾	=	12.38	

Prise de rayures


G1 ^{1)*}	=	11.66	
G ^{1)*}	=	4.19	
alpha1	=	90°	
h	=	0.36	
s *	=	2.00	
i ¹⁾	=	3°00'20"	
w	=		

Canon

F ^{1)*}	=	11.43	
Z ¹⁾	=	11.63	

Rayures

b	=	3.81	
N	=	6	
u	=	356.00	
Q	=	104.94	mm ²

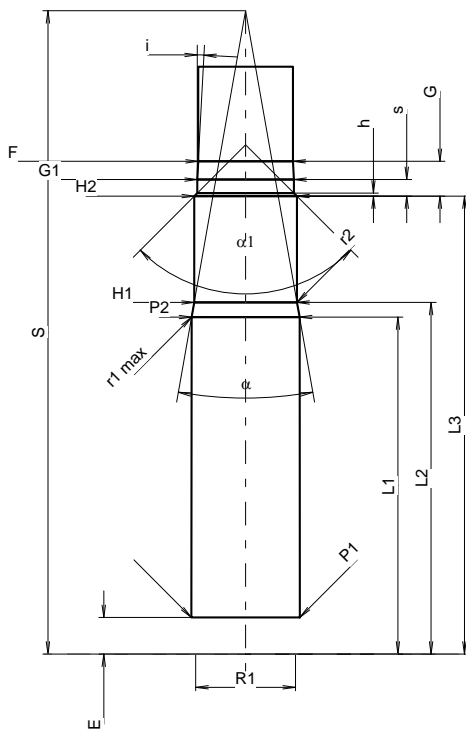

Échelle 1.1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base