

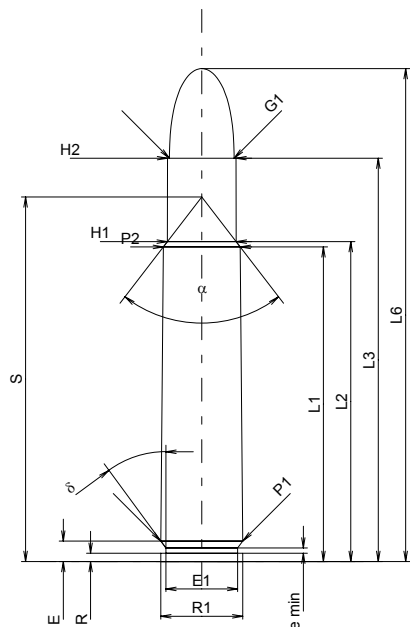
C.I.P.**505 Mag. Gibbs**

TAB. I

Date 84-06-14

Pays d'origine: GB

Révision 02-05-15

**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	62.43	-0.20
L2 ¹⁾	=	63.45	-0.20
L3 ¹⁾	=	80.01	
L4	=		
L5	=		
L6	=	97.79	

Culot

R	=	1.65	
R1	=	16.26	
R3	=		
E	=	4.06	
E1	=	14.22	
e min	=	1.02	
delta	=	36°18'36"	
f	=		
beta	=		

Chambre à poudre

P1	=	16.26	
P2 ¹⁾ *	=	15.24	-0.20

Cône de raccordement

alpha	=	75°09'51"	
S	=	72.33	
r1 min	=		
r2	=		

Collet

H1*	=	13.67	
H2 ¹⁾	=	13.59	

Projectile

G1 ¹⁾	=	12.83	
G2	=		
F	=		
L3+G ¹⁾	=	88.98	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	2700 bar	
PK	=	3105 bar	
PE	=	3375 bar	
M	=	25.00	
EE	=	7040 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=		

CHAMBRE MINI**Longueurs**

L1*	=	62.38	
L2*	=	63.40	
L3 ¹⁾	=	80.31	

Cuvette

R	=	1.65	
R1	=	16.31	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	4.06	
P1 ¹⁾	=	16.28	
P2*	=	15.27	

Cône de raccordement

alpha ¹⁾	=	75°30'57"	
S	=	72.24	
r1 max	=		
r2	=		

Collet

H1*	=	13.69	
H2 ¹⁾	=	13.61	

Prise de rayures

G1 ¹⁾ *	=	12.85	
G ¹⁾ *	=	8.97	
alpha1	=	90°	
h*	=	0.38	
s	=		
i ¹⁾	=	1°00'11"	
w	=		

Canon

F ¹⁾ *	=	12.55	
Z ¹⁾	=	12.80	

Rayures

b	=	5.33	
N	=	5	
u	=	406.00	
Q	=	127.14	mm ²

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base