

C.I.P.**6 mm PPC ITA**

TAB.



I

Date

15-05-19

Pays d'origine: IT

Révision

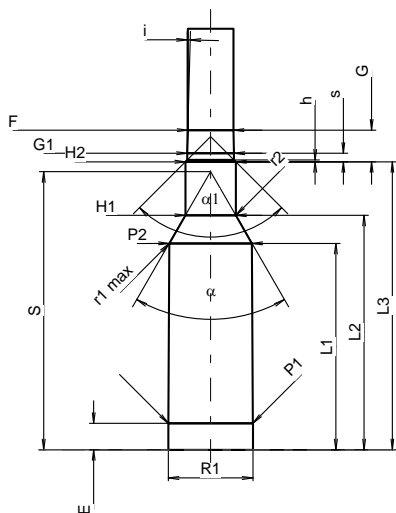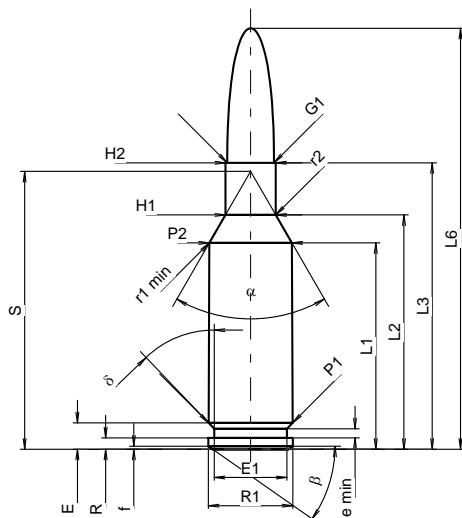

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR1.

CARTOUCHE MAXI**Longueurs**

| | | | |
|------------------|---|-------|-------|
| L1 ¹⁾ | = | 27.30 | -0.20 |
| L2 ¹⁾ | = | 31.00 | -0.20 |
| L3 ¹⁾ | = | 37.90 | |
| L4 | = | | |
| L5 | = | | |
| L6 | = | 55.70 | |

Culot

| | | | |
|-------|---|-----------|--|
| R | = | 1.50 | |
| R1 | = | 11.18 | |
| R3 | = | | |
| E | = | 3.50 | |
| E1 | = | 9.60 | |
| e min | = | 1.20 | |
| delta | = | 43°43'12" | |
| f | = | 0.40 | |
| beta | = | 35° | |

Chambre à poudre

| | | | |
|-------------------|---|-------|-------|
| P1 | = | 11.13 | |
| P2 ^{1)*} | = | 10.92 | -0.20 |

Cône de raccordement

| | | | |
|---------|---|-------|--|
| alpha * | = | 60° | |
| S * | = | 36.76 | |
| r1 min | = | 1.52 | |
| r2 | = | 1.52 | |

Collet

| | | | |
|------------------|---|------|--|
| H1 * | = | 6.63 | |
| H2 ¹⁾ | = | 6.63 | |

Projectile

| | | | |
|--------------------|---|-------|--|
| G1 ¹⁾ | = | 6.17 | |
| G2 | = | | |
| F | = | | |
| L3+G ¹⁾ | = | 42.08 | |

Pressions (Énergies)**Méthode transducteur**

| | | | |
|------|---|------------|--|
| Pmax | = | 4050 bar | |
| PK | = | 4658 bar | |
| PE | = | 5265 bar | |
| M | = | 17.50 | |
| EE | = | 2250 Joule | |

Autres indications

| | | | |
|--------------------|---|------|--|
| Fe ¹⁾³⁾ | = | 0.10 | |
| delta L | = | | |

Notes: 1) A' contrôler pour la sécurité
3) Feuillure sur la cone de raccordement
* Dimensions de base

CHAMBRE MINI**Longueurs**

| | | | |
|------------------|---|-------|--|
| L1 | = | 27.30 | |
| L2 | = | 31.02 | |
| L3 ¹⁾ | = | 38.10 | |

Cuvette

| | | | |
|----|---|-------|--|
| R | = | | |
| R1 | = | 11.20 | |
| R2 | = | | |
| R3 | = | | |
| r | = | | |

Chambre à poudre

| | | | |
|------------------|---|-------|--|
| E | = | 3.50 | |
| P1 ¹⁾ | = | 11.17 | |
| P2 * | = | 10.95 | |

Cône de raccordement

| | | | |
|----------------------|---|-------|--|
| alpha ^{1)*} | = | 60° | |
| S * | = | 36.78 | |
| r1 max | = | 1.52 | |
| r2 | = | 1.52 | |

Collet

| | | | |
|------------------|---|------|--|
| H1 * | = | 6.65 | |
| H2 ¹⁾ | = | 6.65 | |

Prise de rayures

| | | | |
|-------------------|---|-------|--|
| G1 ^{1)*} | = | 6.18 | |
| G ¹⁾ | = | 4.18 | |
| alpha l | = | 90° | |
| h | = | 0.24 | |
| s * | = | 1.13 | |
| i ^{1)*} | = | 1°30' | |
| w | = | | |

Canon

| | | | |
|------------------|---|------|--|
| F ^{1)*} | = | 6.02 | |
| Z ¹⁾ | = | 6.17 | |

Rayures

| | | | |
|-----|---|--------|-----------------|
| b | = | 2.29 | |
| N | = | 6 | |
| u * | = | 551.00 | |
| Q | = | 29.52 | mm ² |