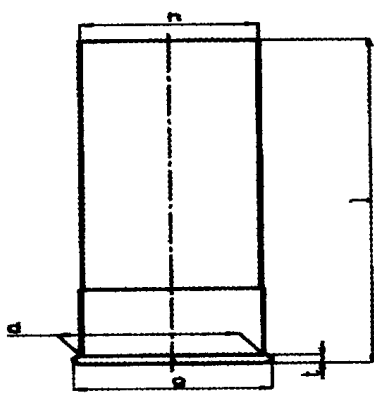
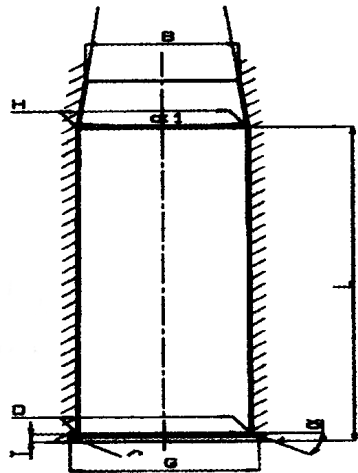


C.I.P.	44/83 SP Pays d'origine : FR	TAB.	X																										
		Date	00-03-02																										
		Révision	18-10-17																										
	<p>CARTOUCHE MAXIMALE</p> <p>Dimens. Valeur Tolér.</p> <p>d¹⁾ = 48,00 - 0.70 g = 51.35 - 0.45 t¹⁾ = 2.10 - 0.40 h = 47.60 - 0.45 l = 83.50 - 2.50</p>																												
		<p>CHAMBRE MINIMALE</p> <p>Dimens. Valeur Tolér.</p> <p>D¹⁾ = 48.00 + 0.10 G = 51.40 + 0.45 T¹⁾ = 2.25 + 0.10 H¹⁾ = 47.70 + 0.15 B¹⁾ = 44.20 + 0.70 α1¹⁾ = 30° max L¹⁾ = 83.50 + 2.00</p> <table border="0"> <tr> <td></td> <td colspan="3">Energie</td> </tr> <tr> <td></td> <td>E_{max}</td> <td>E_K</td> <td>E_E</td> </tr> <tr> <td></td> <td colspan="3">Joule</td> </tr> <tr> <td></td> <td>200</td> <td>214</td> <td>220</td> </tr> </table> <p>Feuillure de l'arme</p> <table border="0"> <tr> <td>Fe</td> <td>= /</td> <td>manomètre</td> </tr> <tr> <td>Fe¹⁾</td> <td>= /</td> <td>à bascule</td> </tr> <tr> <td>Fe¹⁾</td> <td>= /</td> <td>automatique</td> </tr> </table>					Energie				E _{max}	E _K	E _E		Joule				200	214	220	Fe	= /	manomètre	Fe ¹⁾	= /	à bascule	Fe ¹⁾	= /
		Energie																											
	E _{max}	E _K	E _E																										
	Joule																												
	200	214	220																										
Fe	= /	manomètre																											
Fe ¹⁾	= /	à bascule																											
Fe ¹⁾	= /	automatique																											
Echelle 1:2																													
Dimensions en « mm » Dimensions et tolérances pour les canons d'épreuve : Voyez Annexe CR 4.		Notes : 1) A contrôler pour la sécurité																											