


C.I.P.**22 Savage**

TAB. II

Date 84-06-14

Pays d'origine: US

Révision 02-05-15

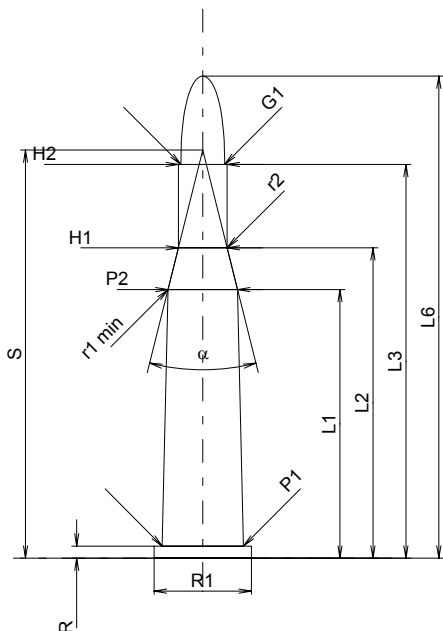**CARTOUCHE MAXI****Longueurs**

L1	=	35.52
L2	=	41.04
L3 ¹⁾	=	52.07
L4	=	
L5	=	
L6	=	63.75

Culot

R ¹⁾	=	1.60	-0.25
R1	=	12.85	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=		
β	=		

Chambre à poudre

P1	=	10.74
P2*	=	9.20

Cône de raccordement

α*	=	28°
S*	=	53.97
r1 min	=	3.81
r2	=	3.81

Collet

H1*	=	6.45
H2 ¹⁾	=	6.45

Projectile

G1 ¹⁾	=	5.79
G2	=	
F	=	
L3+G ¹⁾	=	55.22

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3300 bar
PK	=	3795 bar
PE	=	4125 bar
M	=	25.00
EE	=	1990 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	35.66
L2	=	40.89
L3 ¹⁾	=	52.12

Cuvette

R ¹⁾	=	1.65
R1	=	13.08
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	10.80
P2*	=	9.28

Cône de raccordement

α*	=	28°
S*	=	54.27
r1 max	=	3.81
r2	=	7.62

Collet

H1*	=	6.67
H2 ¹⁾	=	6.55

Prise de rayures


G1 ¹⁾ *	=	6.10
G ¹⁾	=	3.15
α1*	=	17°
h	=	1.51
s	=	
i ¹⁾ *	=	8°30'
w	=	

Canon

F ¹⁾ *	=	5.61
Z ¹⁾	=	5.74

Rayures

b	=	1.65
N	=	6
u	=	305.00
Q	=	25.37 mm ²

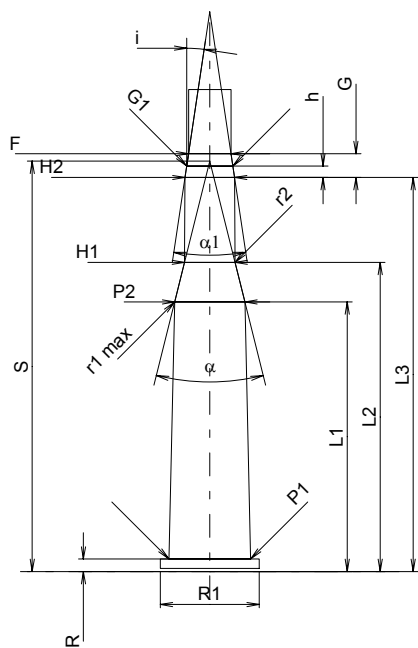

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base