

C.I.P.**240 FI. N.E.**

TAB.

II

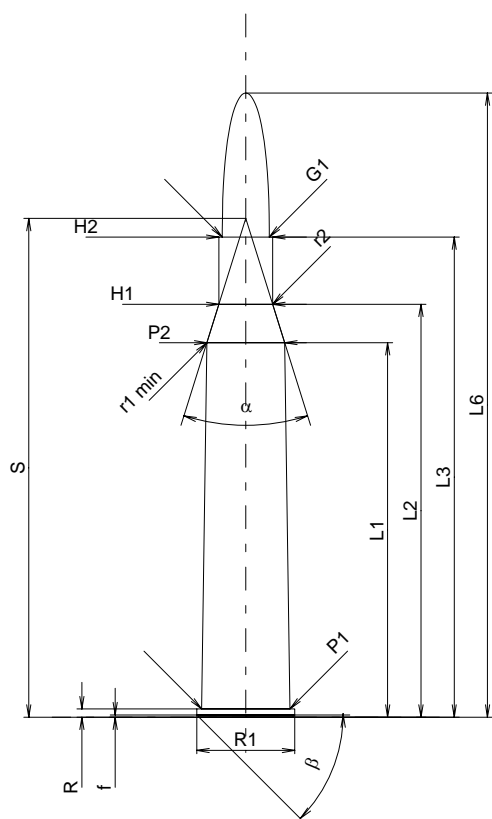
Date

84-06-14

Pays d'origine: GB

Révision

04-05-18

**CARTOUCHE MAXI****Longueurs**

L1 *	=	49.53
L2 *	=	54.61
L3 ¹⁾	=	63.50
L4	=	
L5	=	
L6	=	82.55

Colot

R ¹⁾	=	1.09	-0.25
R1	=	12.95	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Chambre à poudre

P1	=	11.68
P2 *	=	10.29

Cône de raccordement

alpha	=	34°45'33"
S	=	65.97
r1 min	=	4.57
r2	=	4.57

Collet

H1 *	=	7.11
H2 ¹⁾	=	7.11

Projectile

G1 ¹⁾	=	6.22
G2	=	
F	=	
L3+G ¹⁾	=	76.20

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3200 bar
PK	=	3680 bar
PE	=	4000 bar
M	=	25.00
EE	=	2660 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1 *	=	49.56
L2 *	=	54.64
L3 ¹⁾	=	63.75

Cuvette

R ¹⁾	=	1.12
R1	=	13.21
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	11.71
P2 *	=	10.31

Cône de raccordement

alpha	=	34°39'25"
S	=	66.08
r1 max	=	
r2	=	

Collet

H1 *	=	7.14
H2 ¹⁾	=	7.14

Prise de rayures

G1 ¹⁾ *	=	6.30
G ¹⁾ *	=	12.70
alpha1	=	90°
h *	=	0.42
s	=	
i ¹⁾	=	0°39'11"
w	=	

Canon

F ¹⁾ *	=	6.02
Z ¹⁾	=	6.22

Rayures

b	=	3.50
N	=	4
u	=	203.00
Q	=	29.95 mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base