

C.I.P.**25-35 Win.**

TAB.

II

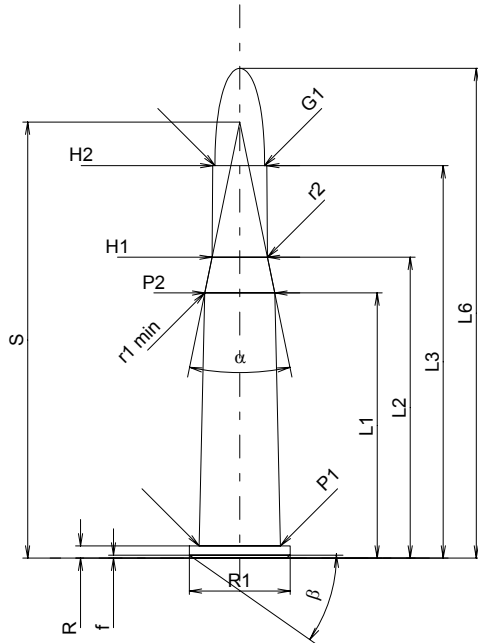
Date

84-06-14

Pays d'origine: US

Révision

02-05-15

**CARTOUCHE MAXI****Longueurs**

L1	=	35.06
L2	=	39.78
L3 ¹⁾	=	51.89
L4	=	
L5	=	
L6	=	64.77

Culot

R ¹⁾	=	1.60	-0.25
R1	=	13.35	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	10.73
P2*	=	9.25

Cône de raccordement

alpha*	=	23°07'59"
S*	=	57.66
r1 min	=	18.80
r2	=	12.70

Collet

H1*	=	7.32
H2 ¹⁾	=	7.15

Projectile

G1 ¹⁾	=	6.55
G2	=	
F	=	
L3+G ¹⁾	=	55.68

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3050 bar
PK	=	3508 bar
PE	=	3810 bar
M	=	25.00
EE	=	1750 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	35.20
L2	=	39.86
L3 ¹⁾	=	52.02

Cuvette

R ¹⁾	=	1.60
R1	=	13.11
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	10.74
P2*	=	9.26

Cône de raccordement

alpha*	=	23°07'58"
S*	=	57.82
r1 max	=	15.24
r2	=	12.70

Collet

H1*	=	7.35
H2 ¹⁾	=	7.18

Prise de rayures

G1 ¹⁾ *	=	7.18
G ¹⁾	=	3.79
alpha1*	=	180°
h	=	
s	=	
i ¹⁾ *	=	6°15'
w	=	

Canon

F ¹⁾ *	=	6.35
Z ¹⁾	=	6.50

Rayures

b	=	2.00
N	=	6
u	=	203.00
Q	=	32.58 mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base