


C.I.P.**375 R Verney-Carron**

TAB. II

Date 10-05-26

Pays d'origine: FR

Révision

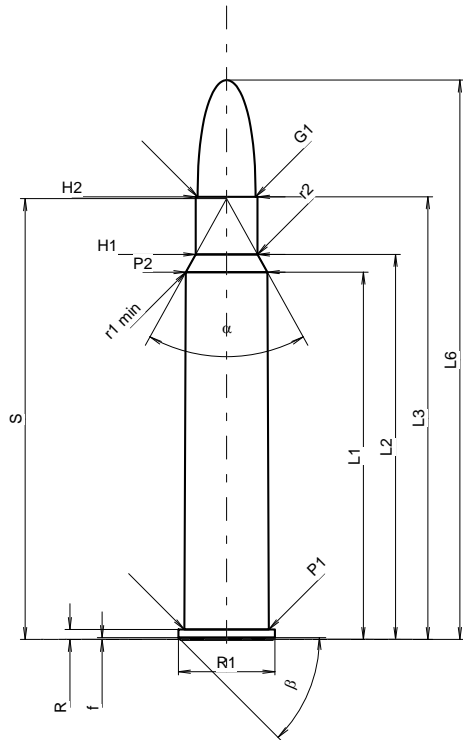**CARTOUCHE MAXI****Longueurs**

L1	=	60.58
L2	=	63.50
L3 ¹⁾	=	73.00
L4	=	
L5	=	
L6	=	92.25

Culot

R ¹⁾	=	1.65
R1	=	15.90 -0.25
R3	=	
E	=	
E1	=	
e min	=	
δ	=	
f	=	0.30
β	=	45°

Chambre à poudre

P1	=	13.95
P2 *	=	13.45

Cône de raccordement

α *	=	58°
S *	=	72.70
r1 min	=	0.50
r2	=	1.70

Collet

H1 *	=	10.21
H2 ¹⁾	=	10.21

Projectile

G1 ¹⁾	=	9.53
G2	=	
F	=	
L3+G ¹⁾	=	84.40

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4100 bar
PK	=	4715 bar
PE	=	5125 bar
M	=	25.00
EE	=	7100 Joule

Autres indications

Fe ¹⁾⁴⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	60.59
L2	=	63.50
L3 ¹⁾	=	73.30

Cuvette

R ¹⁾	=	1.65
R1	=	15.93
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	13.98
P2 *	=	13.48

Cône de raccordement

α *	=	58°
S *	=	72.75
r1 max	=	0.30
r2	=	1.70

Collet

H1 *	=	10.26
H2 ¹⁾	=	10.26

Prise de rayures


G1 ¹⁾ *	=	9.54
G ¹⁾	=	11.40
α1	=	90°
h	=	0.36
s *	=	7.51
i ¹⁾ *	=	1°46'
w	=	

Canon

F ¹⁾ *	=	9.30
Z ¹⁾	=	9.53

Rayures

b	=	2.92
N	=	6
u	=	305.00
Q	=	69.98 mm ²

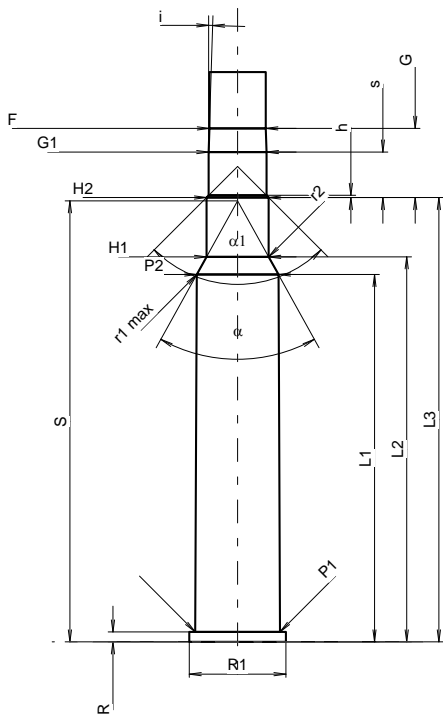

Échelle 1:1.25

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
4) Feuillure sur la bourrelet
* Dimensions de base