

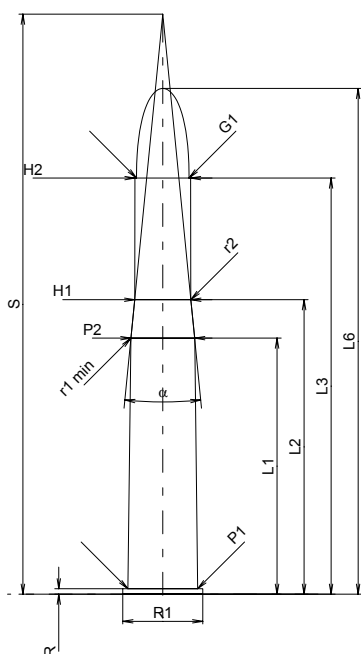
C.I.P.**450/400 Mag. N.E. 3"1/4**

TAB. II

Date 84-06-14

Pays d'origine: GB

Révision 02-05-15

**CARTOUCHE MAXI****Longueurs**

L1*	=	50.80
L2*	=	58.42
L3 ¹⁾	=	82.55
L4	=	
L5	=	
L6	=	100.33

Culot

R ¹⁾	=	1.07	-0.25
R1	=	15.85	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=		
beta	=		

Chambre à poudre

P1	=	13.84
P2*	=	12.65

Cône de raccordement

alpha	=	11°14'33"
S	=	115.06
r1 min	=	19.56
r2	=	19.56

Collet

H1*	=	11.15
H2 ¹⁾	=	11.05

Projectile

G1 ¹⁾	=	10.41
G2	=	
F	=	
L3+G ¹⁾	=	92.87

Pressions (Énergies)**Méthode transducteur**

Pmax	=	2950 bar
PK	=	3393 bar
PE	=	3690 bar
M	=	25.00
EE	=	6993 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1*	=	50.83
L2*	=	58.45
L3 ¹⁾	=	82.80

Cuvette

R ¹⁾	=	1.09
R1	=	16.10
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	13.87
P2*	=	12.67

Cône de raccordement

alpha	=	11°10'04"
S	=	115.63
r1 max	=	
r2	=	

Collet

H1*	=	11.18
H2 ¹⁾	=	11.07

Prise de rayures

G1 ¹⁾ *	=	10.50
G ¹⁾ *	=	10.32
alpha1	=	90°
h*	=	0.29
s	=	
i ¹⁾	=	0°58'14"
w	=	

Canon

F ¹⁾ *	=	10.16
Z ¹⁾	=	10.41

Rayures

b	=	3.56
N	=	7
u	=	381.00
Q	=	84.25 mm ²

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base