

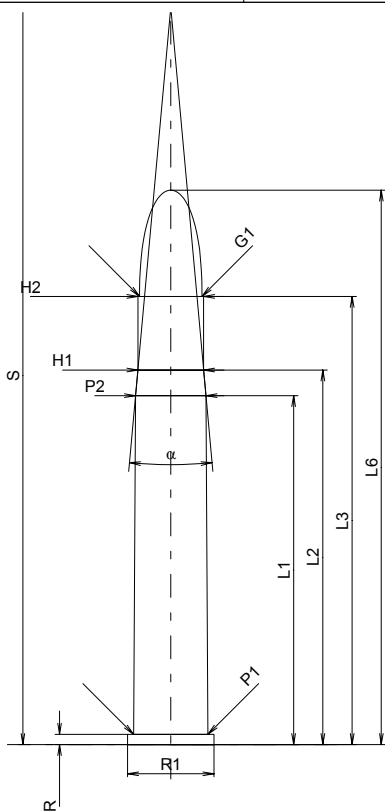
C.I.P.**475 N°2 N.E. 3"1/2 Jeffery**

TAB. II

Date 98-01-27

Pays d'origine: GB

Révision 02-05-15

**CARTOUCHE MAXI****Longueurs**

L1*	=	69.21
L2*	=	74.29
L3 ¹⁾	=	88.90
L4	=	
L5	=	
L6	=	109.98

Colot

R ¹⁾	=	2.03	-0.25
R1	=	17.14	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=		
β	=		

Chambre à poudre

P1	=	14.73
P2*	=	13.97

Cône de raccordement

α	=	10°20'53"
S	=	146.35
r1 min	=	
r2	=	

Collet

H1*	=	13.05
H2 ¹⁾	=	13.05

Projectile

G1 ¹⁾	=	12.39
G2	=	
F	=	
L3+G ¹⁾	=	96.54

Pressions (Énergies)**Méthode transducteur**

Pmax	=	2750 bar
PK	=	3163 bar
PE	=	3440 bar
M	=	25.00
EE	=	6957 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1*	=	69.24
L2*	=	74.32
L3 ¹⁾	=	89.15

Cuvette

R ¹⁾	=	2.06
R1	=	17.40
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	14.76
P2*	=	14.00

Cône de raccordement

α	=	10°27'36"
S	=	145.71
r1 max	=	
r2	=	

Collet

H1*	=	13.07
H2 ¹⁾	=	13.07

Prise de rayures

G1 ¹⁾ *	=	12.42
G ¹⁾ *	=	7.64
α1	=	90°
h*	=	0.33
s	=	
i ¹⁾	=	1°12'53"
w	=	

Canon

F ¹⁾ *	=	12.11
Z ¹⁾	=	12.42

Rayures

b	=	2.67
N	=	7
u	=	457.00
Q	=	118.10 mm ²

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base