

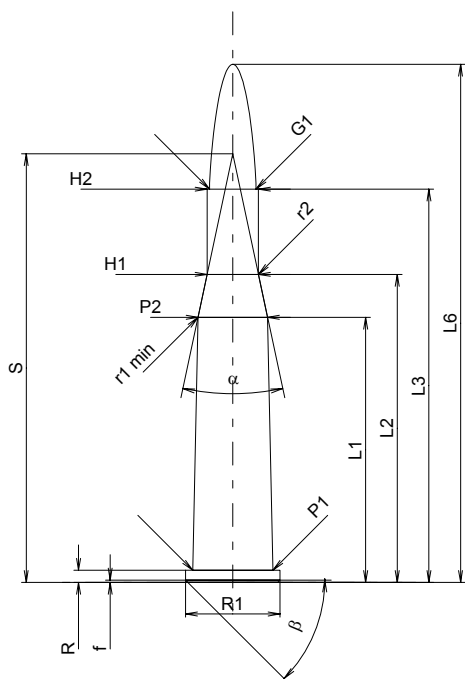
C.I.P.**6 x 52 R Bretschneider**

TAB. II

Date 98-01-27

Pays d'origine: DE

Révision 02-05-15

**CARTOUCHE MAXI****Longueurs**

L1*	=	35.04
L2*	=	40.73
L3 ¹⁾	=	52.00
L4	=	
L5	=	
L6	=	68.50

Culot

R ¹⁾	=	1.60	-0.25
R1	=	12.50	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Chambre à poudre

P1	=	10.62
P2*	=	9.20

Cône de raccordement

alpha	=	24°00'38"
S	=	56.67
r1 min	=	0.50
r2	=	0.50

Collet

H1*	=	6.78
H2 ¹⁾	=	6.78

Projectile

G1 ¹⁾	=	6.17
G2	=	
F	=	
L3+G ¹⁾	=	58.67

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3300 bar
PK	=	3795 bar
PE	=	4125 bar
M	=	25.00
EE	=	2205 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1*	=	35.03
L2*	=	40.72
L3 ¹⁾	=	52.30

Cuvette

R ¹⁾	=	1.60
R1	=	12.55
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	10.65
P2*	=	9.23

Cône de raccordement

alpha	=	24°00'39"
S	=	56.73
r1 max	=	3.80
r2	=	7.50

Collet

H1*	=	6.81
H2 ¹⁾	=	6.80

Prise de rayures

G1 ¹⁾ *	=	6.19
G ¹⁾ *	=	6.67
alpha1	=	90°
h	=	0.31
s*	=	3.00
i ¹⁾	=	1°19'36"
w	=	

Canon

F ¹⁾ *	=	6.02
Z ¹⁾	=	6.17

Rayures

b	=	1.73
N	=	6
u	=	254.00
Q	=	29.25 mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base