


C.I.P.**7 x 75 R SE.v.H.**

TAB. II

Date 84-06-14

Pays d'origine: DE

Révision 02-05-15

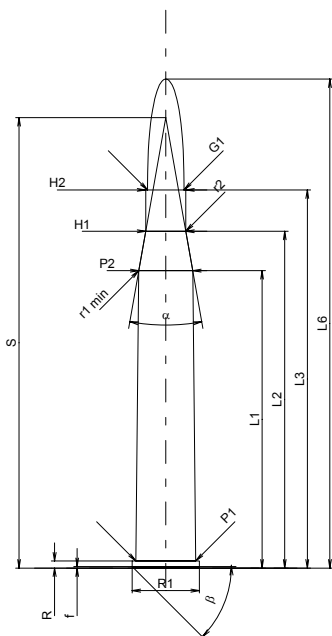**CARTOUCHE MAXI****Longueurs**

L1 [*]	=	59.00
L2 [*]	=	66.80
L3 ¹⁾	=	75.00
L4	=	
L5	=	
L6	=	97.00

Culot

R ¹⁾	=	1.40	-0.25
R1	=	13.35	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=	0.30	
β	=	45°	

Chambre à poudre

P1	=	11.90
P2 [*]	=	10.70

Cône de raccordement

α	=	19°59'42"
S	=	89.35
r1 min	=	0.50
r2	=	0.50

Collet

H1 [*]	=	7.95
H2 ¹⁾	=	7.95

Projectile

G1 ¹⁾	=	7.24
G2	=	
F	=	
L3+G ¹⁾	=	94.00

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4150 bar
PK	=	4773 bar
PE	=	5190 bar
M	=	25.00
EE	=	4830 Joule

Autres indications

Fe ¹⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1 [*]	=	59.00
L2 [*]	=	66.80
L3 ¹⁾	=	75.50

Cuvette

R ¹⁾	=	1.40
R1	=	13.45
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	11.93
P2 [*]	=	10.73

Cône de raccordement

α	=	19°59'42"
S	=	89.43
r1 max	=	0.50
r2	=	0.50

Collet

H1 [*]	=	7.98
H2 ¹⁾	=	7.97

Prise de rayures


G1 ¹⁾ *	=	7.36
G ¹⁾ *	=	19.00
α1	=	180°
h	=	
s	=	
i ¹⁾	=	0°34'22"
w	=	

Canon

F ¹⁾ *	=	6.98
Z ¹⁾	=	7.24

Rayures

b	=	3.70
N	=	4
u	=	240.00
Q	=	40.29 mm ²

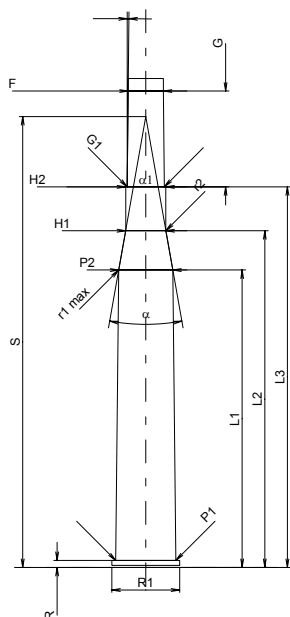

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base