


C.I.P.**9,3 x 53 R Finnish**

TAB. II

Date 95-03-09

Pays d'origine: FI

Révision 02-05-15

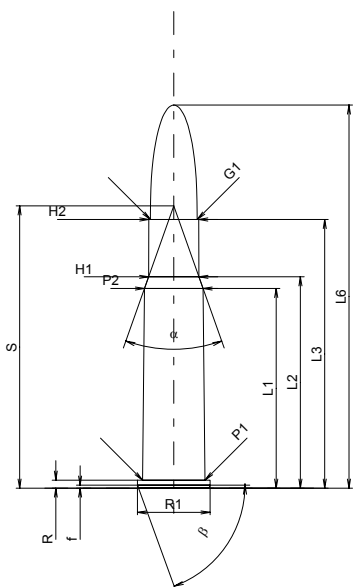**CARTOUCHE MAXI****Longueurs**

L1 [*]	=	39.61
L2 [*]	=	41.94
L3 ¹⁾	=	53.30
L4	=	
L5	=	
L6	=	76.00

Culot

R ¹⁾	=	1.60	-0.25
R1	=	14.40	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=	0.60	
β	=	70°	

Chambre à poudre

P1	=	12.42
P2 [*]	=	11.61

Cône de raccordement

α	=	38°59'44"
S	=	56.00
r1 min	=	
r2	=	

Collet

H1 [*]	=	9.96
H2 ¹⁾	=	9.90

Projectile

G1 ¹⁾	=	9.30
G2	=	
F	=	
L3+G ¹⁾	=	76.08

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3400 bar
PK	=	3910 bar
PE	=	4250 bar
M	=	25.00
EE	=	4300 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1 [*]	=	39.70
L2 [*]	=	42.14
L3 ¹⁾	=	53.80

Cuvette

R ¹⁾	=	1.60
R1	=	14.43
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	12.45
P2 [*]	=	11.67

Cône de raccordement

α	=	37°21'43"
S	=	56.96
r1 max	=	
r2	=	

Collet

H1 [*]	=	10.02
H2 ¹⁾	=	9.96

Prise de rayures


G1 ¹⁾ *	=	9.36
G ¹⁾ *	=	22.78
α1	=	90°
h	=	0.30
s [*]	=	11.55
i ¹⁾	=	0°47'25"
w	=	

Canon

F ¹⁾ *	=	9.05
Z ¹⁾	=	9.28

Rayures

b	=	3.10
N	=	6
u	=	380.00
Q	=	66.51 mm ²

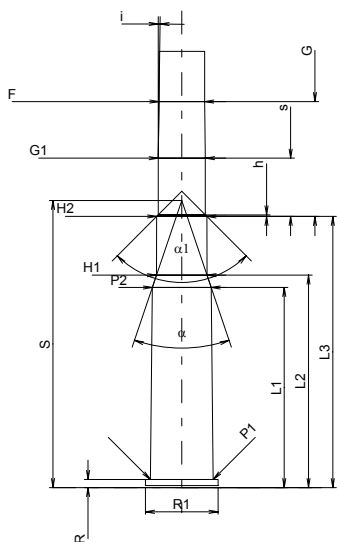

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base