

C.I.P.**30 Super Belt Riml. H&H**

TAB.

III

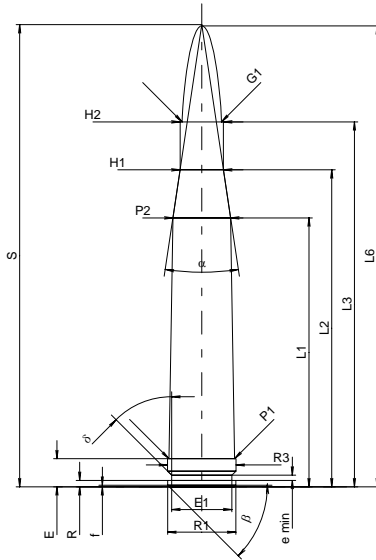
Date

84-06 14

Révision

02-05-15

Pays d'origine: GB

**CARTOUCHE MAXI****Longueurs**

L1 *	=	53.34
L2 *	=	62.87
L3 ¹⁾	=	72.39
L4	=	
L5	=	
L6	=	91.44

Culot

R	=	1.27
R1	=	13.51
R3	=	13.56
E ¹⁾	=	5.56
E1	=	11.94
e min	=	1.02
δ	=	45°
f	=	0.30
β	=	45°

Chambre à poudre

P1	=	13.03
P2 *	=	11.43

Cône de raccordement

α	=	16°56'59"
S	=	91.69
r1 min	=	
r2	=	

Collet

H1 *	=	8.59
H2 ¹⁾	=	8.59

Projectile

G1 ¹⁾	=	7.82
G2	=	
F	=	
L3+G	=	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3650 bar
PK	=	4198 bar
PE	=	4563 bar
M	=	25.00
EE	=	4305 Joule

Autres indications

Fe	=	
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	
L2	=	
L3	=	

Cuvette

R	=	
R1	=	
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1	=	
P2	=	

Cône de raccordement

α	=	
S	=	
r1 max	=	
r2	=	

Collet

H1	=	
H2	=	

Prise de rayures

G1	=	
G	=	
α1	=	
h	=	
s	=	
i	=	
w	=	

Canon

F ¹⁾ *	=	7.61
Z ¹⁾	=	7.82

Rayures

b	=	2.72
N	=	6
u	=	254.00
Q	=	47.24 mm ²

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base