


C.I.P.**400 H&H Belt. Mag.**

TAB. III

Date 05-05-25

Pays d'origine: GB

Révision

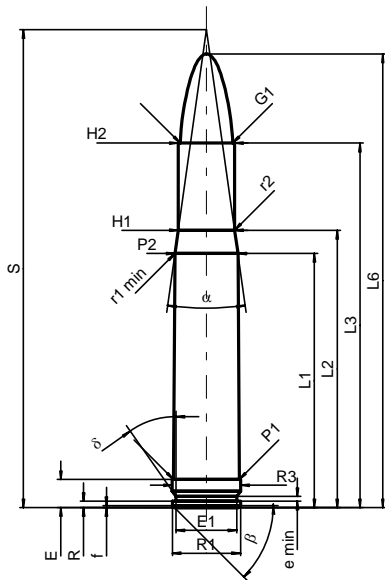**CARTOUCHE MAXI****Longueurs**

L1	=	50.40
L2	=	55.02
L3 ¹⁾	=	72.30
L4	=	
L5	=	
L6	=	90.00

Culot

R	=	1.27
R1	=	13.51
R3	=	13.56
E ¹⁾	=	5.59
E1	=	12.07
e min	=	0.94
delta	=	35°
f	=	0.41
beta	=	45°

Chambre à poudre

P1	=	13.03
P2 *	=	12.50

Cône de raccordement

alpha *	=	16°01'01"
S *	=	94.82
r1 min	=	0.50
r2	=	0.50

Collet

H1 *	=	11.20
H2 ¹⁾	=	11.20

Projectile

G1 ^{1)*}	=	10.44
G2	=	
F	=	
L3+G ¹⁾	=	82.26

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4400 bar
PK	=	5060 bar
PE	=	5500 bar
M	=	25.00
EE	=	6800 Joule

Autres indications

Fe ¹⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	50.24
L2	=	54.83
L3 ¹⁾	=	72.60

Cuvette

R	=	
R1	=	13.59
R2	=	
R3	=	13.59
r	=	

Chambre à poudre

E ¹⁾	=	5.59
P1 ¹⁾	=	13.06
P2 *	=	12.53

Cône de raccordement

alpha *	=	15°59'53"
S *	=	94.82
r1 max	=	0.50
r2	=	0.50

Collet

H1 *	=	11.24
H2 ¹⁾	=	11.23

Prise de rayures


G1 ^{1)*}	=	10.45
G ¹⁾	=	9.96
alpha 1 *	=	90°
h	=	0.39
s *	=	5.95
i ^{1)*}	=	1°30'
w	=	

Canon

F ^{1)*}	=	10.24
Z ¹⁾	=	10.44

Rayures

b	=	3.33
N	=	6
u	=	305.00
Q	=	84.39 mm ²

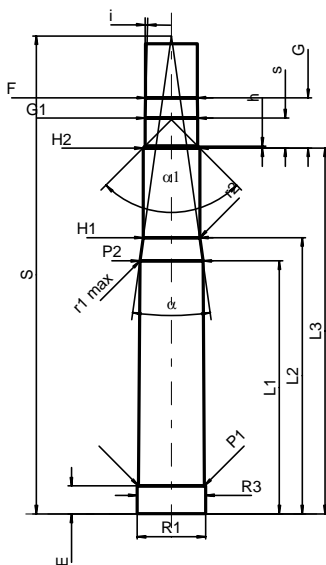

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A contrôler pour la sécurité
* Dimensions de base