


C.I.P.**416 Rem. Mag.**

TAB. III

Date 89-09-10

Révision 04-05-18

Pays d'origine: US

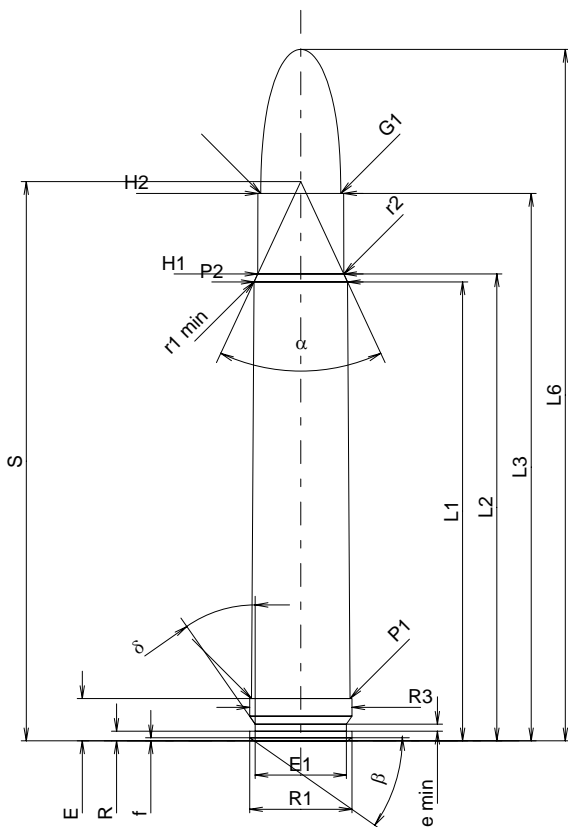**CARTOUCHE MAXI****Longueurs**

L1	=	60.69
L2	=	61.74
L3 ¹⁾	=	72.39
L4	=	
L5	=	
L6	=	91.44

Colot

R	=	1.27
R1	=	13.51
R3	=	13.51
E ¹⁾	=	5.59
E1	=	12.06
e min	=	0.94
delta	=	35°
f	=	0.41
beta	=	35°

Chambre à poudre

P1	=	13.02
P2*	=	12.36

Cône de raccordement

alpha*	=	50°
S*	=	73.94
r1 min	=	1.02
r2	=	2.54

Collet

H1*	=	11.38
H2 ¹⁾	=	11.35

Projectile

G1 ¹⁾	=	10.57
G2	=	
F	=	
L3+G ¹⁾	=	82.81

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4300 bar
PK	=	4945 bar
PE	=	5375 bar
M	=	25.00
EE	=	7245 Joule

Autres indications

Fe ¹⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	60.88
L2	=	61.93
L3 ¹⁾	=	72.96

Cuvette

R	=	
R1	=	13.59
R2	=	
R3	=	13.59
r	=	

Chambre à poudre

E ¹⁾	=	5.59
P1 ¹⁾	=	13.05
P2*	=	12.39

Cône de raccordement

alpha*	=	50°
S*	=	74.17
r1 max	=	0.76
r2	=	3.18

Collet

H1*	=	11.41
H2 ¹⁾	=	11.38

Prise de rayures


G1 ¹⁾ *	=	10.62
G ¹⁾	=	10.42
alpha1*	=	90°
h	=	0.38
s	=	5.46
i ¹⁾ *	=	1°30'
w	=	

Canon

F ¹⁾ *	=	10.36
Z ¹⁾	=	10.57

Rayures

b	=	3.25
N	=	6
u	=	356.00
Q	=	86.38 mm ²

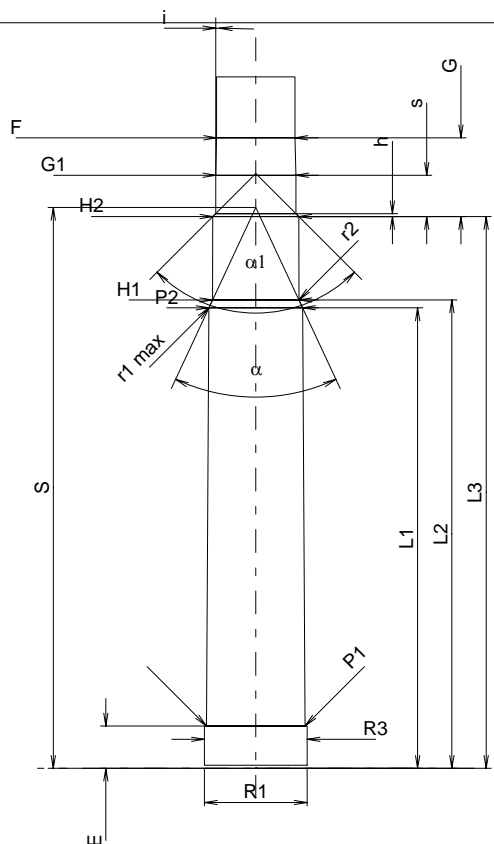

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base