

**C.I.P.****6,8/18**

TAB.

VI

Date

84-06-14

Révision

90-06-13

Pays d'origine: DE/IT

**CARTOUCHE MAXI****CHAMBRE MINI****Longueurs**

|                  |   |       |
|------------------|---|-------|
| L1               | = |       |
| L2               | = |       |
| L3 <sup>1)</sup> | = | 18.70 |
| L4               | = |       |
| L5               | = |       |
| L6               | = | 18.00 |

**Longueurs**

|                  |   |       |
|------------------|---|-------|
| L1               | = |       |
| L2               | = |       |
| L3 <sup>1)</sup> | = | 19.00 |

**Colot**

|       |   |      |
|-------|---|------|
| R     | = | 1.45 |
| R1    | = | 8.40 |
| R3    | = |      |
| E     | = |      |
| E1    | = |      |
| e min | = |      |
| δ     | = |      |
| f     | = |      |
| β     | = |      |

**Cuvette**

|                 |   |      |
|-----------------|---|------|
| R <sup>1)</sup> | = | 1.45 |
| R1              | = | 8.55 |
| R2              | = |      |
| R3              | = |      |
| r               | = |      |

**Chambre à poudre**

|    |   |      |
|----|---|------|
| P1 | = | 6.86 |
| P2 | = |      |

**Chambre à poudre**

|    |   |      |
|----|---|------|
| E  | = |      |
| P1 | = | 6.90 |
| P2 | = |      |

**Cône de raccordement**

|        |   |  |
|--------|---|--|
| α      | = |  |
| S      | = |  |
| r1 min | = |  |
| r2     | = |  |

**Cône de raccordement**

|        |   |  |
|--------|---|--|
| α      | = |  |
| S      | = |  |
| r1 max | = |  |
| r2     | = |  |

**Collet**

|                  |   |      |
|------------------|---|------|
| H1               | = |      |
| H2 <sup>1)</sup> | = | 6.86 |

**Collet**

|    |   |      |
|----|---|------|
| H1 | = |      |
| H2 | = | 6.90 |

**Volumes [cm<sup>3</sup>]**

|      |   |      |
|------|---|------|
| VC   | = | 0.61 |
| Va 1 | = | 0.16 |
| Va 2 | = | 0.80 |

**Prise de rayures**

|                 |   |      |
|-----------------|---|------|
| G1 <sup>*</sup> | = | 6.00 |
| G               | = |      |
| α1              | = | 180° |
| h               | = |      |
| s               | = |      |
| i               | = |      |
| w               | = |      |

**Pressions (Énergies)****Méthode transducteur [Va1]**

|      |   |          |
|------|---|----------|
| Pmax | = | 4500 bar |
| PK   | = | 5175 bar |
| PE   | = | 5850 bar |

**Méthode transducteur [Va2]**



|      |   |          |
|------|---|----------|
| Pmax | = | 2500 bar |
| PK   | = | 2875 bar |
| PE   | = | 3250 bar |
| M    | = |          |

**Canon**

|                |   |      |
|----------------|---|------|
| F <sup>*</sup> | = | 6.00 |
| Z              | = | 6.00 |

**Volumes [cm<sup>3</sup>]**

|       |   |      |
|-------|---|------|
| V(ET) | = | 0.74 |
| V(T)  | = |      |

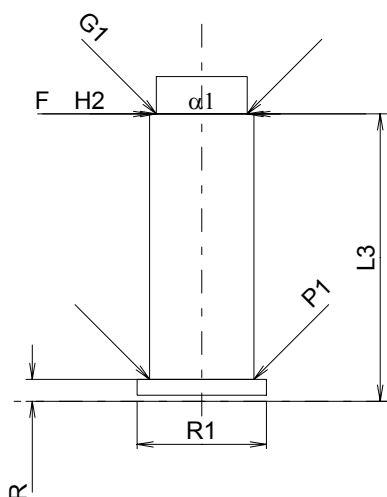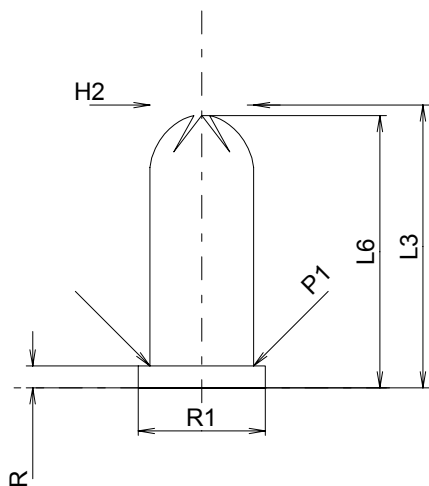

Échelle 2:1

Dimensions en << mm >>  
Dimensions et tolérances pour les canons  
d'épreuve: Voyez Annexe CR 3.

Notes: 1) A' contrôler pour la sécurité  
\* Dimensions de base